




-10 HOUSING

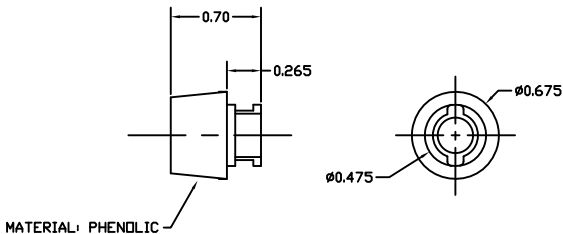

-11 HOUSING

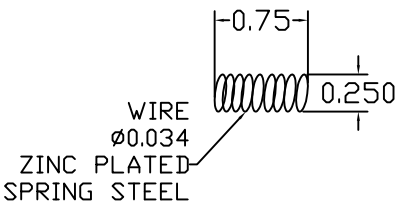

-12 SPRING

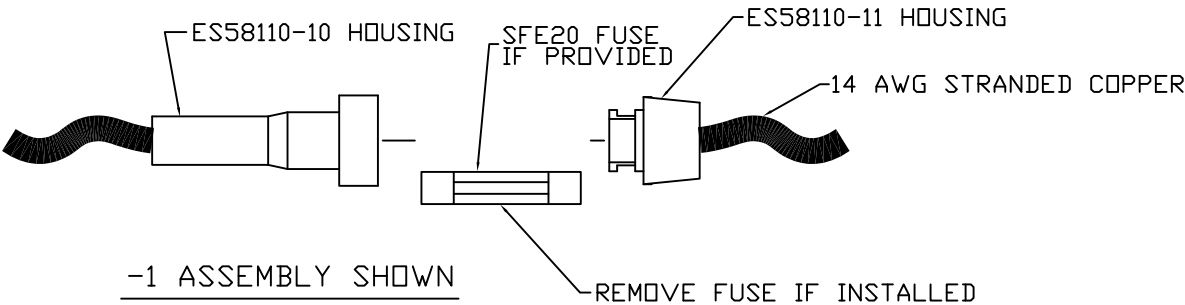

-1 ASSEMBLY SHOWN  
RATED 32 VOLTS  
20 AMPS

-CONFIDENTIAL INFORMATION-  
THE INFORMATION AND DATA CONTAINED HEREIN  
IS PROPRIETARY AND IS SUBMITTED IN CONFIDENCE,  
AND SHALL NOT BE DISCLOSED, USED OR DUPLICATED  
FOR ANY PURPOSE WHATSOEVER WITHOUT THE PRIOR  
WRITTEN PERMISSION OF PARAVION TECHNOLOGY, INC.

SHEET	REV	ECO	DATE	DESCRIPTION	APR	CHK
1	A		05/25/94	VENDOR WAS COLD AIR PRODUCTS	REB	
1	B		07/05/94	VENDOR WAS RADIO SHACK	LS	
1	C		06/09/04	0.70 WAS 0.700. ADDED 'WIRE DIA. 0.034 ZINC PLATED SPRING STEEL' CALLOUT TO -12 SPRING. ADDED 'VOLTAGE & CURRENT NOTE. ADDED 'STRANDED COPPER' CALLOUT TO 14 AWG WIRE. ADDED ACCEPTABLE MANUFACTURER: 'BUSS' FOR -12 SPRING.	REB	LS
1	D		04/08/08	REDRAWN FOR CLARITY, ADDED REF. FUSES NO CHANGE TO SPECIFICATION	REB	LS
1	E		04/02/2012	(11/09/10) CLARIFIED MFR'S CALLOUT	REB	LS

FUSE-HOLDER MANUFACTURER:

COOPER BUSSMAN  
ST. LOUIS, MISSOURI USA  
ES58110-1 MFR'S P/N: HRJ (INCL. SFE 20 FUSE)  
ALT. HRJ-LESS-FUSE(Does NOT INCL. FUSE)

INSTALLED FUSE MUST BE  $\phi \frac{1}{4}$  X  $1 \frac{1}{4}$  LONG  
COOPER BUSSMAN TYPE AGC FUSES  
ARE ACCEPTABLE (AVAIL. 0.05-20 AMP)

REFERENCE FUSE PART NUMBERS

RATING(AMP)	PART NO.	MANUFACTURER
2	AGC-2	COOPER BUSSMAN
3	AGC-3	COOPER BUSSMAN
5	AGC-5	COOPER BUSSMAN
15	AGC-15	COOPER BUSSMAN
20	AGC-20	COOPER BUSSMAN

Paravion® Technology Inc.		TITLE FUSE HOLDER (20 AMP)		DRAWING NO. ES58110	
DIMENSIONS IN INCHES		DRAWN BY TMN	APRVD. BY REB	CHK'D BY LS	DATE 05/02/91
TOLERANCES EXCEPT WHERE NOTED:		DO NOT SCALE DRAWING			REV E
.X = ± .1 .XX = ± .05 .XXX = ± .010		© 2004 PARAVION TECH., INC. PARAVION IS A TRADEMARK OF PARAVION TECHNOLOGY, INC.			ECO
ANGLES = ± 1°		SHEET 1 OF 1			

PROTO  
N/C